Limited Ninety-Day Warranty

OR PERFORMANCE OF THE PRODUCT OR ARISING OUT OF ANY BREACH OF THIS WAR-RANTY, INCLUDING, BUT NOT LIMITED TO, ANY DAMAGES RESULTING FROM INCONVE-NIENCE, LOSS OF TIME, DATA, PROPERTY, REVENUE, OR PROFIT OR ANY INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, EVEN IF RADIOSHACK HAS BEEN ADowned stores and authorized RadioShack franchisees and dealers. EXCEPT AS PROVIDED ARE LIMITED IN DURATION TO THE DURATION OF THE WRITTEN LIMITED WARRANTIES HEREIN, RadioShack MAKES NO EXPRESS WARRANTIES AND ANY IMPLIED WARRANTIES ship under normal use for ninety (90) days from the date of purchase from RadioShack company. This product is warranted by RadioShack against manufacturing defects in material and workman VISED OF THE POSSIBILITY OF SUCH DAMAGES. SPECT TO ANY LIABILITY, LOSS OR DAMAGE CAUSED DIRECTLY OR INDIRECTLY BY USE TY OR RESPONSIBILITY TO CUSTOMER OR ANY OTHER PERSON OR ENTITY WITH RE-CONTAINED HEREIN. EXCEPT AS PROVIDED HEREIN, RadioShack SHALL HAVE NO LIABIL-INCLUDING THOSE OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE

cidental or consequential damages, so the above limitations or exclusions may not apply to you. In the event of a product defect during the warranty period, take the product and the RadioShack Some states do not allow the limitations on how long an implied warranty lasts or the exclusion of in-

original warranty period. You will be charged for repair or replacement of the product made after the warranty service. Repaired or replaced parts and products are warranted for the remainder of the erry of RadioShack. New or reconditioned parts and products may be used in the performance of labor; (b) replace the product with one of the same or similar design; or (c) refund the purchase price. All replaced parts and products, and products on which a refund is made, become the propsales receipt as proof of purchase date to any RadioShack store. RadioShack will, at its option, unexpiration of the warranty period. ess otherwise provided by law: (a) correct the defect by product repair without charge for parts and

of product removal, installation, set-up service adjustment or reinstallation. fuses or batteries; (d) cosmetic damage; (e) transportation, shipping or insurance costs; or (f) costs accident, misuse, improper or abnormal usage, fallure to follow instructions, improper installation or maintenance, alteration, lightning or other incidence of excess voltage or current; (b) any repairs other than those provided by a RadioShack Authorized Service Facility; (c) consumables such as his warranty does not cover: (a) damage or failure caused by or attributable to acts of God, abuse

This warranty gives you specific legal rights, and you may also have other rights which vary from

RadioShack Customer Relations, Dept. W, 100 Throckmorton St., Suite 600, Fort Worth, TX 76102

We Service What We Sel

A Division of Tandy Corporation Fort Worth, Texas 76102 RadioShack

Printed in the USA

Omnidirectional Dynamic Microphone

tion. duce sensitivity to handling and vibra-Internal Shock Mounting — helps re-

breath pop and wind noise Built-In Windscreen

reduces

systems with 1/4-inch jacks. to professional public address (PA) Phone Plugs — for easy connection 15-Foot Cable with XLR and 1/4-Inch

standard threads. for use with stands that have 5/8-inch Adjustable Microphone Holder —

Arille: 95 B1105

your recording system. namic Microphone by Shure provides the versatile performance you need for Your RadioShack Omnidirectional Dy-

in all directions. gives you full-frequency sound pick-up Its omnidirectional sensitivity pattern


hand-held or stand-mounted vocal and instrumental use, either This microphone is unsurpassed for

atures include:


pick up sound from all directions with Omnidirectional Design — lets you no loss of frequency response.

lets you vary the distance from the trequency response. sound source without changes Constant Frequency Response -

FREQUENCY RESPONSE

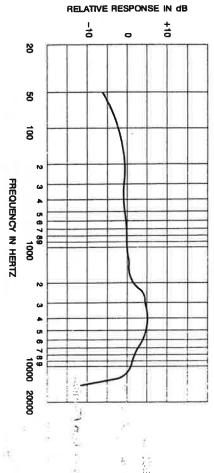

PATTERN POLAR PICKUP



14 0000	6300 Hz	2H 000	250 M2

SPECIFICATIONS

Weight (including cable) 17.7 oz (500 g)
Dimensions (HW) $6^{17}/_{16} \times 1^{15}/_{16}$ Inches (170 mm × 49 mm)
C Tinish Black Enamel
Case Zinc and Plastic
Connector 3-pin Audio Type
Hum Pickup (Equivalent SPL in 1 mOe field) 28.0 dB
Sensitivity (at 1.0 kHz)75 dB (0 dB = 1V/μbar)
Frequency Response 50 to 15,000 Hz
Impedance 200 Ohms
Directivity Omnidirectional
Microphone Type Dynamic

Specifications are typical; individual units might vary. Specifications are subject to change and improvement without notice.